


Included in the Box:

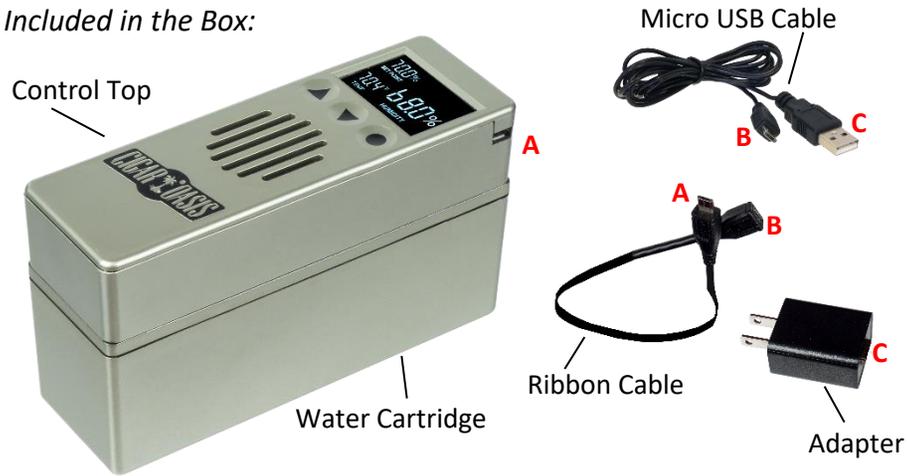

ASSEMBLY & STARTING YOUR CIGAR OASIS EXCEL 3.0

Remove all contents from the box and remove all plastic wrap. Locate the water cartridge which is pre-filled with **distilled water** and remove plastic caps.

- 1) Place the cartridge on a table with the Cigar Oasis sticker facing you.
- 2) Place the control top with the screen on the left side on top of the cartridge while aligning the notches on both pieces.
- 3) Hold the cartridge in place while sliding the control top left (push from the logo side) until it locks into place.
- 4) Connect the ribbon cable **A** to the port on the **EXCEL 3.0** unit **A**. The flat part of the ribbon cable will slide out the side of the humidor or through the hinges at either corner.
- 5) Connect the Ribbon Cable **B** to the Micro USB cable **B**.
- 6) Then connect **C** to the Adapter **C** and plug into an outlet.

Cartridge Refill Instructions

- 1) Fill a bowl with **distilled water only** and submerge the cartridge in it for 4 minutes or pour water in holes, wait for water to absorb and repeat until it stops absorbing.
- 2) Take the cartridge out and let it stand for another minute.
- 3) Empty all remaining water out of the cartridge so only damp foam remains. ****No water should drip out when the cartridge is held upside down**.**

- 4) Dry off the cartridge and put the unit back together.

USING YOUR CIGAR OASIS EXCEL 3.0

- Once the unit is put together and plugged in, it turns on after a few seconds of powering up and then it will read the current humidity. The unit is factory preset at 70% humidity. As soon as the humidity drops below 70% the fan will come on to add moisture to the humidor.
- To raise or lower the humidity settings use the **UP** or **DOWN** arrows.
- When the unit needs to be refilled with distilled water, the **Low Water** and **Alert** icons will flash on display.  
- When the cartridge is refilled and the unit gets to the setpoint the icons will shut off.

To Change Temperature Between Fahrenheit and Celsius

- 1) Hold the **CIRCLE** button until the **F** or **C** start flashing.
- 2) Press the **UP** arrow to select Celsius or Fahrenheit.
- 3) Hold the **CIRCLE** button down until **F** or **C** stop flashing to save the changes.

To Calibrate the Humidity

- 1) Hold the **CIRCLE** and **UP** arrow until the screen displays **U**.
- 2) Use **UP** and **DOWN** arrows to raise or lower humidity +/-9%.
- 3) Hold the **CIRCLE** and **UP** arrow to save the changes.

Set UP Wi-Fi

If you would like to have access to your **Excel 3.0** from your phone anywhere in the world download our Cigar Oasis SmartHumidor™ App. Create an account and follow the instructions in the app to set up. While setting up you will be prompted to download a Setup App to connect to your network.





For warranty information go to www.cigaroasis.com



79 Heisser Court
Farmingdale, NY 11735
516.520.5258
www.cigaroasis.com

Cigar Oasis...the best in cigar humidification just got even better!